



Symbol of Quality
Architectural Hardware



IS-6315



CML-1769574

IS-3564



CML-8024054

PRODUCT CATALOGUE





Symbol of Quality
Architectural Hardware

About Us

Sandhu door closers, are one of the prominent Manufacture traders, suppliers and distributors of a wide assortment of Door Closers Products and Accessories. The range of our product is widely appreciated for dimensional accuracy, durable finish, smooth edges, sturdy design and resistance to abrasion as well as corrosion.

Adherence to timely delivery schedules and a wide market network assist us in the delivering the consignments to the desired destinations well on time. We have a reliable logistics team working round the clock to look after the delivery process and further maintaining the safety conditions of the entire product range.

We have huge warehousing facility fully equipped with the latest technology to procure and store our products. Also, we are committed to improve upon the existing standards of our products. Furthermore these attributes of ours and our ethical business policy, quality product, timely delivery and competitive price have helped us in forming a huge clientèle.





Symbol of Quality
Architectural Hardware



IS-6315

CML-1769574

IS-3564

CML-8024054

Contents

FLOOR SPRING	1-3
DOOR CLOSERS	4
PATCH FITTINGS	5-6
SHOWER HINGES	7-8
GLASS CONNECTORS	7-8
PLASTIC PROFILE	9
KNIGHT HEAD ACC.	10
DOOR KNOBS, REINFORCING BAR	10
OFFICE SLIDING SYSTEM	11-12
LOCKS WITHOUT CUTOUT	13
AUTOMATING SLIDING SENSOR DOOR	14
DOOR HANDLES	15-16



Symbol of Quality





Floor Spring



Symbol of Quality

 Tested to
5,00,000 Cycle



Door Size Door Weight

SMFS - G-2 Sleek Double Cylinder Floor Hinge

Over 5,00,000 Cycles Tested.

Suitable for both side opening.

Suitable for door weight from 90-120 kgs.



Suitable for wooden and toughened glass doors.

Closing force 25 Nm.

Suitable for door dimension (1200 x 2400 mm).

Opening angle 90° / 115°

 Tested to
5,00,000 Cycle



Door Size Door Weight

SMFS - G-3 Sleek Single Cylinder Floor Hinge

Over 5,00,000 Cycles Tested.

Suitable for both side opening.

Suitable for door weight from 70-90 kgs.

Suitable for wooden and toughened glass doors.

Closing force 19 Nm.


Suitable for door dimension (900 x 2100 mm).

Opening angle 90° / 115°




Floor Spring

Symbol of Quality

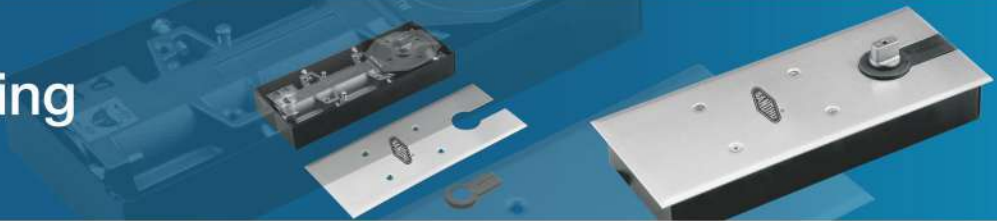

Tested to 5,00,000 Cycle



SMFS - 02 Heavy Duty

Double Action
Cast Iron Body
Adjustable Speed
Locking at 90°
Suitable for Either Metal Framed or Wooden Door
Doors Weighing upto 125 kg or 1200mm in Width

Tested to 5,00,000 Cycle




SMFS - 72 Light Duty

Double Action
Cast Iron Body
Adjustable Speed
Locking at 90°
Suitable for Either Metal Framed or Wooden Door
Doors Weighing upto 80 kg or 1000mm in Width



Tested to 5,00,000 Cycle



SMFS - 32 Extra Heavy Duty

Double Action
Cast Iron Body
Adjustable Speed
Locking at 90°
Suitable for Either Metal Framed or Wooden Door
Doors Weighing upto 125 kg or 1200mm in Width



SMFS - ACC Top Pivot



Bottom Arm

Door Closers



Symbol of Quality




SMDC - 2111 Aluminium Die Casted Body / Cast Iron Body

Rack and Pinion Alloy Steel Duly Heat Treated
Adjustable Speed
Available in Silver, Golden & Brown Colours
Suitable for Either Metal Framed or Wooden Doors
Suitable for Doors Weighing upto 45-60 Kg.
or 1000mm in Width
Right Hand & Left Hand Opening Doors



SMDC - 2115 Aluminium Extruded Section Body


Rack and Pinion Alloy Steel Duly Heat Treated
Double Speed Adjustment
Available in Silver, Golden & Brown Colours
Suitable for Either Metal Framed or Wooden Doors
Suitable for Doors Weighing upto 45-80 Kg.
or 1000mm in Width
Right Hand & Left Hand Opening Doors



SMDC - 2100 Pelmet Arm Door Closer

Track Arm with Hold Open Function, Power Adjustable with Spring.
Single Body size, Powerful Enough to Meet for Medium to Heavy Duty
Door Weight and Sizes.

Double Speed Adjustment
Suitable for Doors Weighing upto 60-80 Kg.



SMDC - 2116 Capsule Door Closer

Best for Use on Light Weight Doors upto 40 Kgs.
Iron / Aluminium / Zinc Body
Rust Resistant Finish





Symbol of Quality



Patch Fittings



Symbol of Quality



SMPF-10
Top Patch



SMPF-10
Bottom Patch



SMPL-2A
Lock Patch



SMPF-40
Big L



SMPF-610
Small L



SMPF-30
Over Panel Patch



SMPF-620
Square Patch



SMPF-650
Connector For Double Glass



SM-GDP
Top Pivot



SANDHU

Symbol of Quality

17

Shower Hinges & Glass Connectors



Shower Hinges Zinc / SS 304



SMSSH-1

Wall to Glass 90° Hinge
Material : Zinc / SS 304
Door Thickness : 8mm-12mm
Weight Cap.: 45 Kg.
Finish : Matt & Chrome Plated



SMSSH-2

Glass to Glass 180° Hinge
Material : Zinc / SS 304
Door Thickness : 8mm-12mm
Weight Cap.: 45 Kg.
Finish : Matt & Chrome Plated



SMSSH-3

Glass to Glass 135° Hinge
Material : Zinc / SS 304
Door Thickness : 8mm-12mm
Weight Cap.: 45 Kg.
Finish : Matt & Chrome Plated



SMSSH-4

Glass to Glass 90° Hinge
Material : Zinc / SS 304
Door Thickness : 8mm-12mm
Weight Cap.: 45 Kg.
Finish : Matt & Chrome Plated



SMSSH-5

Wall to Glass 90° Fix Bracket
Material : Zinc / SS 304
Door Thickness : 8mm-12mm
Weight Cap.: 45 Kg.
Finish : Matt & Chrome Plated

Glass Connectors SS 202 / SS 304



SMGC-1

U Connector
Material : SS 202 / SS 304
Door Thickness : 8mm-12mm
Finish : Matt & Chrome Plated



SMGC-2

Glass to Glass 135°
Material : SS 202 / SS 304
Door Thickness : 8mm-12mm
Finish : Matt & Chrome Plated



SMGC-3

Glass to Glass 90°
Material : SS 202 / SS 304
Door Thickness : 8mm-12mm
Finish : Matt & Chrome Plated



SMGC-4

L Connector
Material : SS 202 / SS 304
Door Thickness : 8mm-12mm
Finish : Matt & Chrome Plated




SMGC-5

Glass to Glass 180°
Material : SS 202 / SS 304
Door Thickness : 8mm-12mm
Finish : Matt & Chrome Plated




Plastic Profiles

Symbol of Quality




SMPP-01

For : 8/10/12mm glass
Size : 2.2mtr



SMPP-02

For : 8/10/12mm glass
Size : 2.2mtr




SMPP-03

For : 8/10/12mm glass
Size : 2.2mtr




SMPP-04

For : 8/10/12mm glass
Size : 2.2mtr



SMPP-05

For : 8/10/12mm glass
Size : 2.2mtr



SMPP-06

For : 8/10/12mm glass
Size : 2.2mtr




SMPP-M1

For : 8/10/12mm glass
Size : 2.2mtr



SMPP-M2

For : 8/10/12mm glass
Size : 2.2mtr



SMPP-M3

For : 8/10/12mm glass
Size : 2.2mtr





Shower Knight Head Acc.



Symbol of Quality



SMKH-01
Wall to Rod (Dia 19mm)



SMKH-02
Rod to Glass (Dia 19mm)



SMKH-03
Rod to Rod (Dia 19mm)



SMKH-04
Rod to Rod Connector (Dia 19mm)

Door Knobs

Reinforcing Bars



SMDK-01



SMDK-02



SMRB-01



SMRB-02



SANDHU[®]
Symbol of Quality

11

Office Sliding Systems



Symbol of Quality



SMSL-44-A1

Roller (S.S.)

Four fiber reinforced plastic rollers of 30 mm diameter
Stainless Steel Grade 304 glass holding point
Height adjustable glass holding points (10 mm)
Secure grip for the door
Self aligning suspension of door
Roller configuration for even distribution of load
Independently connected rollers to prevent damage to track and rollers
Suitable for 10 mm or 12 mm glass
Suitable for door weight 40 kg.



SMSL-44-A2

Roller (Brass)

Heavy duty sliding door roller
Suitable for up to a door weight of 80 Kg
Larger surface area for secure grip of the door
Adjustable threaded rod for installation perfection
Solid brass for glass holding



G-Glider

Roller

(For Wooden and Aluminium Doors)

Heavy duty sliding door roller
Suitable for up to a door weight of 80 Kg
Larger surface area for secure grip of the door



SMSL-44G

Floor Guide



SMSL-44-A3

Stopper



SMSL-44-A4

Side Plate For Track



SMSL-HN-80

Rectangle Handle



SMSL-HN-50

Rectangle Handle



Lock's without Cutout

Symbol of Quality



SMLK-1
Double Door Lock



SMLK-2
Single Door Lock



SMLK-3
Double Door Lock



SMLK-4
Single Door Lock



SMLK-5
Double Door Lock



SMLK-6
Single Door Lock



SMLK-7
Double Door Lock (Push Button)



SMLK-8
Single Door Lock (Push Button)



SMLK-9
Double Door Lock



SMLK-10
Single Door Lock





Automatic Sliding Sensor Door



Symbol of Quality



Smooth and Silent

It moves silently with use of DC brush-less motor and moves smoothly due to highly precise design.

Power Saving

High efficient circuit is designed in order to save electricity.

DC Brush-less Motor

DC brush -less motor benefit with high rotational speed, low electric consumption & protection from overloading. More advantages are rapid response, potential torque, plus linear variation of voltage.

Multi Function Controller

It's a micro processor controller with LED display. It has multi function that you can set according to you needs. The self-learning microprocessor control ensures reliable operation keeps the motion cycles harmonized and satisfies high safety requirements.

User Friendly

Due to it user friendly module, it's easily adaptable to individual requirement.



Door Sensor



Controller



Safety Beam



Motor



Tail Wheel



Belt



Door Stopper



Track



Symbol of Quality

Door Handles



Symbol of Quality

* All Sizes are in mm



SMDH-55 H Handle

Diameter	Centre to Centre Hole	Overall Length
25	212	325
25	240	325
25	455	600
32	302	457
32	480	600
32	700	900
32	900	1200
32	1200	1500



SMDH-77 (S Handle)

Diameter	Centre to Centre Hole	Overall Length
25	250	350
32	302	457
32	420	600



SMDH-11 (D Handle)

Diameter	Centre to Centre Hole	Overall Length
25	302	327
25	420	450
32	568	600



SMDH-55 (Dotted)

Diameter	Centre to Centre Hole	Overall Length
25	200	325
32	302	457
32	480	600

Towel Bar Handle



SMDH-TB-1

Diameter	Centre to Centre Hole	Overall Length
19	152	457cc
25	152	457cc

